arXiv:1304.0037v1 [cond-mat.str-el] 29 Mar 2013

Non-Monotonic Dynamic Conductance in the Spin-1/2 Kondo Regime in a Single-Electron Transistor

Bryan Hemingway,[1] Stephen Herbert,[2] Michael Melloch,[3] and Andrei Kogan[1,*]

[1] *Department of Physics, University of Cincinnati, Cincinnati, OH 45221, USA*

[2] *Physics Department, Xavier University, Cincinnati, Ohio 45207, USA*

[3] *School of Electrical and Computer Engineering,*
Purdue University, West Lafayette, Indiana 47907, USA

(Dated: April 2, 2013)

Abstract

We present measurements of time-averaged differential conductance G in a single-electron transistor tuned to the spin 1/2 Kondo regime and demonstrate an anomalous non-monotonic dependence of G on frequency, indicating a change in the density of states in the dynamic regime. At zero external magnetic field, we vary the frequency and amplitude of bias oscillations and identify a suppression of G when the photon energy hf becomes comparable to the Kondo temperature k_BT_K. As the frequency increases above k_BT_K/h ,as well as for bias oscillation amplitudes larger than k_BT_K/e where e is the electron charge, we find that the G approaches the values expected for adiabatic behavior and show that these observations agree with available theoretical predictions. We also report very sharp peaks in the conductance as function of magnetic field which appear at frequencies $f \geq k_BT_K/h$ and are absent at low frequencies. These features are currently not understood.

PACS numbers: 73.23.-b, 73.23.Hk, 73.63.Rt, 73.43.Fj

The discovery of the Kondo effect[1–3] in a Single-electron transistor[4–6] has enabled precision studies of many-body effects away from equilibrium. The Kondo singlet, formed by a spin confined within a conductor and interacting with itinerant electrons, is one of the simplest examples of a many body state. In a single-Electron transistor, non-equilibrium effects can be studied by applying a bias voltage to macroscopic "leads" coupled by tunnel barrier to a small charged island, and precisions comparisons to theory can be performed because the confining potential and the coupling to the leads can be controlled electrostatically. One of the central questions in nonequilibrium Kondo physics is whether the Kondo Temperature T_K retains the role of the universal energy scale that it has for the equilibrium Kondo phenomena due to a hierarchical and self-consistent renormalisation of the density of states near the fermi energy[4–6]. It has been shown, that, indeed, the Kondo scale remains universal when the deviation from equilibrium is small[7,8], and departures from universality have been observed in SETs subjected to an external magnetic field above a certain threshold in the Zeeman energy[8]. Furthermore, SETs provide a variable tool for investigations of the dynamic Kondo effect, i.e. when the bias voltage, or the confining potential, or both , are varying in time[9–11]. It has been generally suggested theoretically that transport across an SET should show deviations from adiabatic behavior at frequencies comparable to the Kondo temperature, $f \sim k_B T_K/h$, and that universality with respect to the Kondo temperature and frequency should be present[12–18]. A recent experiment by Latta et al[19] presents evidence of universality with respect to the ratio of the photon frequency and the Kondo temperature in the absorption spectrum in Kondo-correlated quantum dots. Evidence of non-adiabatic Kondo transport in SETs has been found expermentally in two prior studies[9,10], including the emergence of photon-mediated peaks in the nonlinear conductance[10]. Overall, however, there is presently a significant disparity between the volume of theoretical work on the dynamic Kondo physics[13–15,18] and available transport studies.

In this letter, we focus on the time-averaged conductance, G=d$\langle$I$\rangle$/dV$_{ds}$, of the SET in the Kondo regime at zero time-averaged bias in presence of a microwave-frequency signal. We show that, as the frequency approaches the Kondo temperature, the frequency dependence $G(f)$ becomes non-monotonic: The G drops significantly compared to a value that one would expect if adiabatic behavior is assumed, and then rises again as the frequency increases past $k_B T_K/h$. This indicates a transition to a dynamic Kondo regime featuring distinct non-adiabatic Kondo behavior in the differential conductance, as the bias frequency is swept past

$k_B T_K/h$. To perform a quantitative comparison to theory, we propose a method to calibrate the input microwave power to the device bias oscillation amplitude based on theoretical predictions[17]. Our findings start with deviations from the adiabatic behavior for frequencies below T_K. In two different SETs and in several cooldowns, we find an increasing deviation from adiabatic behavior as the frequency approaches $k_B T_K/h$. For frequencies above T_K, the amplitude- and frequency-dependent conductance exhibits low amplitude agreement with the dynamic prediction of Kaminski, et al.[16,17]. In addition, we report a strongly non-monotonic dependence of G on external magnetic field which appears at frequencies $f \gtrsim k_B T_K/h$ regime but is absent in the adiabatic regime, and attribute it to dynamic Kondo physics that is presently not understood.

Our SET devices are made from a GaAs/AlGaAs heterostructure via e-beam and photolithography techniques. The electron density of the 2DEG is $n_{2D} = 4.8 \times 10^{11}$ cm^{-2} and the electron mobility is $\mu \geq 5 \times 10^5$ cm$^2/V, sec$, as determined by magnetotransport measurements at ∼4.2K. The effective Lande g-factor is measured via cotunneling measurements and found to be 0.207[8,20]. The differential conductance is measured by standard lock-in amplification techniques with an excitation oscillation of 17 Hz and amplitide of $1.9\mu V_{rms}$. The quantum dot is formed by applying negative voltages to the four surface electrodes and the bound electron energy is varied by the nearby gate voltage, V_g, shown in the inset of fig. 1 (a). First, we tune the SET to an odd occupancy, noted by the emergence of the strong zero bias Kondo conductance peak in a Coulomb-blockade valley flanked by Kondo-free valleys. We obtain T_K by fitting the conductance as a function of temperature to the standard empirical Kondo scaling function[4], a well established procedure, for multiple values of the gate voltage. Then, we fix the gate voltage at the center of the valley, where the Kondo temperature is 800 mK for SET 1 and 700 mK for SET 2, corresponding to a frequency scale $f = k_B T_K/h \approx 16$ GHz. The base electron temperature is 70 mK in our dilution refrigerator. Throughout the presented measurements, the zero bias static conductance peak never varied more than 5% over several months of measurements. A microwave-frequency oscillating voltage is supplied by capacitively coupling the microwave signal to the source-drain circuit close to the sample mount. The frequencies used have much longer wavelengths than the dimensions of the SET and the mean free path of the 2DEG, which we estimate to be 5.8 μm[8].

We begin by discussing the low frequency regime. In this case, the slow oscillations

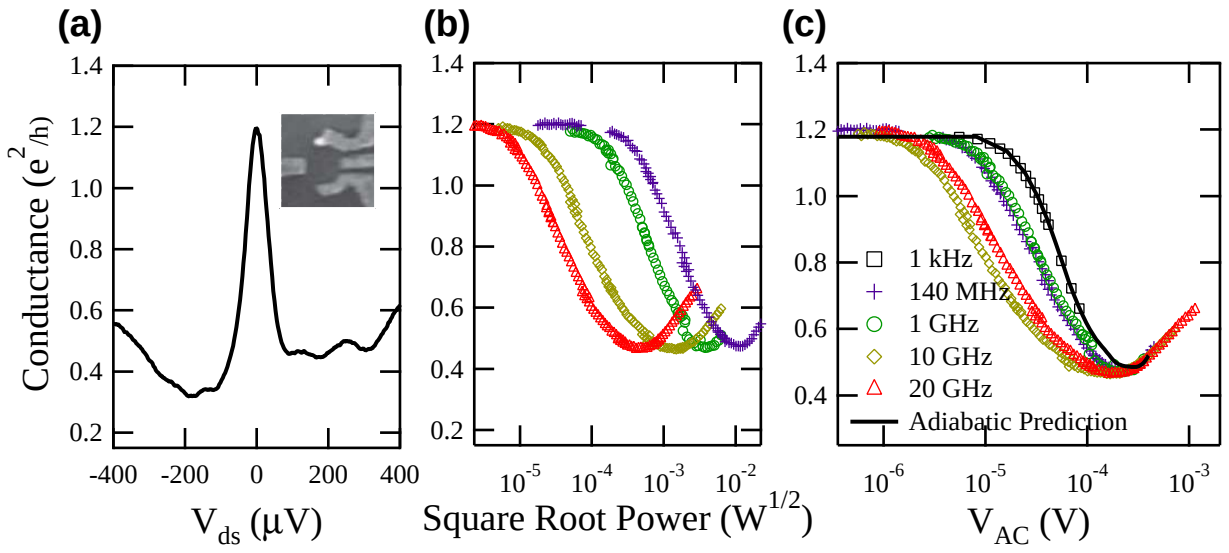

FIG. 1: (a) The center of valley bias conductance enhanced by the Kondo effect. INSET: A micrograph of the SET gate layout. The lithographic size of the dot is approximately 180 nm, and the 2-dimensional electron gas is 85 nm below the heterostructure surface. (b) The conductance as a function of the square root power for several frequencies demonstrates a systematic shift with frequency due to the frequency-dependent coupling between the microwave feed line and the sample, T(f) (see text). (c) The calibration of the T(f) and, therefore, the microwave voltage on the sample, achieved by requiring the data at different frequencies match at high amplitudes where the adiabatic regime is expected at all frequencies used.

of the bias permit the correlations to for faster than the rate which the bias changes. In a SET, this implies that the time dependent current traces the static I-V behavior. The expected conductance is therefore the time average of the static Kondo enhancement due to a sinusoidal bias. It can be computed analytically using the measured static nonequilibrium conductance, $G_{DC}(V)$, as

$$\langle G \rangle = \frac{1}{T} \int_0^T G_{DC}(V_{ds} + V_{AC} sin(\omega t))dt, \tag{1}$$

where ω=2πf and T is the period of the oscillation. In fig. 1 (c), we show conductance data for 1 kHz bias oscillations and compare to the predictions of eqn. 1 ising the static Kondo enhanced nonlinear conductance data shown in fig. 1(a). The adiabatic prediction is easily seen to be valid for these very slow oscillations. The remaining portion of this work examines deviations of G from the the adiabatic predictions at frequencies comparable to T$_K$.

As noted by Elzerman et al.[9], quantitative analysis of transport in presence of micorwaves is complicated by the frequency dependent coupling between the microwave source and the sample . This can seen in fig. 1(b) which shows that we need to span orders of magnitude in power to generate comparable conductance suppressions. To develop a calibration technique for the bias oscillation amplitude vs supplied power at a given frequency, we first assume that the source-sampling coupling has no amplitude dependence for a fixed frequency, i.e. that the microwave circuit is linear: $V_{sample}^2 = T(f)P_{source}$ where P_{input} is power output of the microwave generator and T(f) is the unknown, frequency-dependent transmission coefficient. Next we point out that it is theoretically predicted by Kaminski et al.[17] that amplitudes sufficiently larger than the photon energy, hf, produce adiabatic behavior and eqn. 1 should be valid. Therefore we determine T(f) so that the measured conductances at different frequencies agree numerically at larger amplitudes, $V_{AC} > 200\mu$V. This effectively produces a calibration of V_{AC} , seen in figs 1(b) and 1(c). With this calibration, a rich frequency dependence emerges as the amplitude is varied.

Fig. 1 (c) shows several frequencies for the first SET used, spanning a broad range. We apply frequencies below the T_K, 1 kHZ, 140 MHz, 1.1 GHz and 10 GHz, testing the adiabatic limit. Fig 1(c) shows the zero bias conductance as a function of amplitude. The 1 kHz data agrees well with the adiabatic prediction. Surprisingly, the deviation from adiabatic predictions can be seen at frequencies as low as 140 MHz and 1.1 GHz, significantly below the k_BT_K/h value.

As frequencies approach T_K, we find that the deviation from adiabatic behavior increases. For an applied 10 GHz signal, the conductance is suppressed at a much smaller V_{AC} than both 1.1 GHz and 140 MHz oscillations. We thus find that non-adiabatic behavior begins to emerge well below the predicted Kondo timescale and becomes stronger as the frequency nears T_K.

The transition to the non-adiabatic Kondo regime is readily seen by the frequency dependent sensitivity of the conductance to the oscillation amplitude (fig. 2). For frequencies near k_BT_K/h, the conductance difference, ΔG in fig. 2(b), is greatest as the amplitude approaches T_K signifying strong sensitivity to amplitudes smaller than the photon energy and T_K. For a second SET configuration shown in fig. 2 (c), one frequency, f=15 GHz, very near to T_K demonstrates very strong deviations from the adiabatic conductance. Fig 2 (d,e) shows vertical cross sections of the false color plots in (b,c) for select frequencies near and above T_K, clearly showing the strong deviation from the adiabatic prediction. To illustrate the effect further, we focus on the bias oscillation amplitude V_{AC}(f,G^*) that is required to produce a certain level of conductance suppression G^*, as shown in fig. 2(a). Fig. 3 shows three values fo G^* chosen as different fractions of the microwaves-free conductance G for

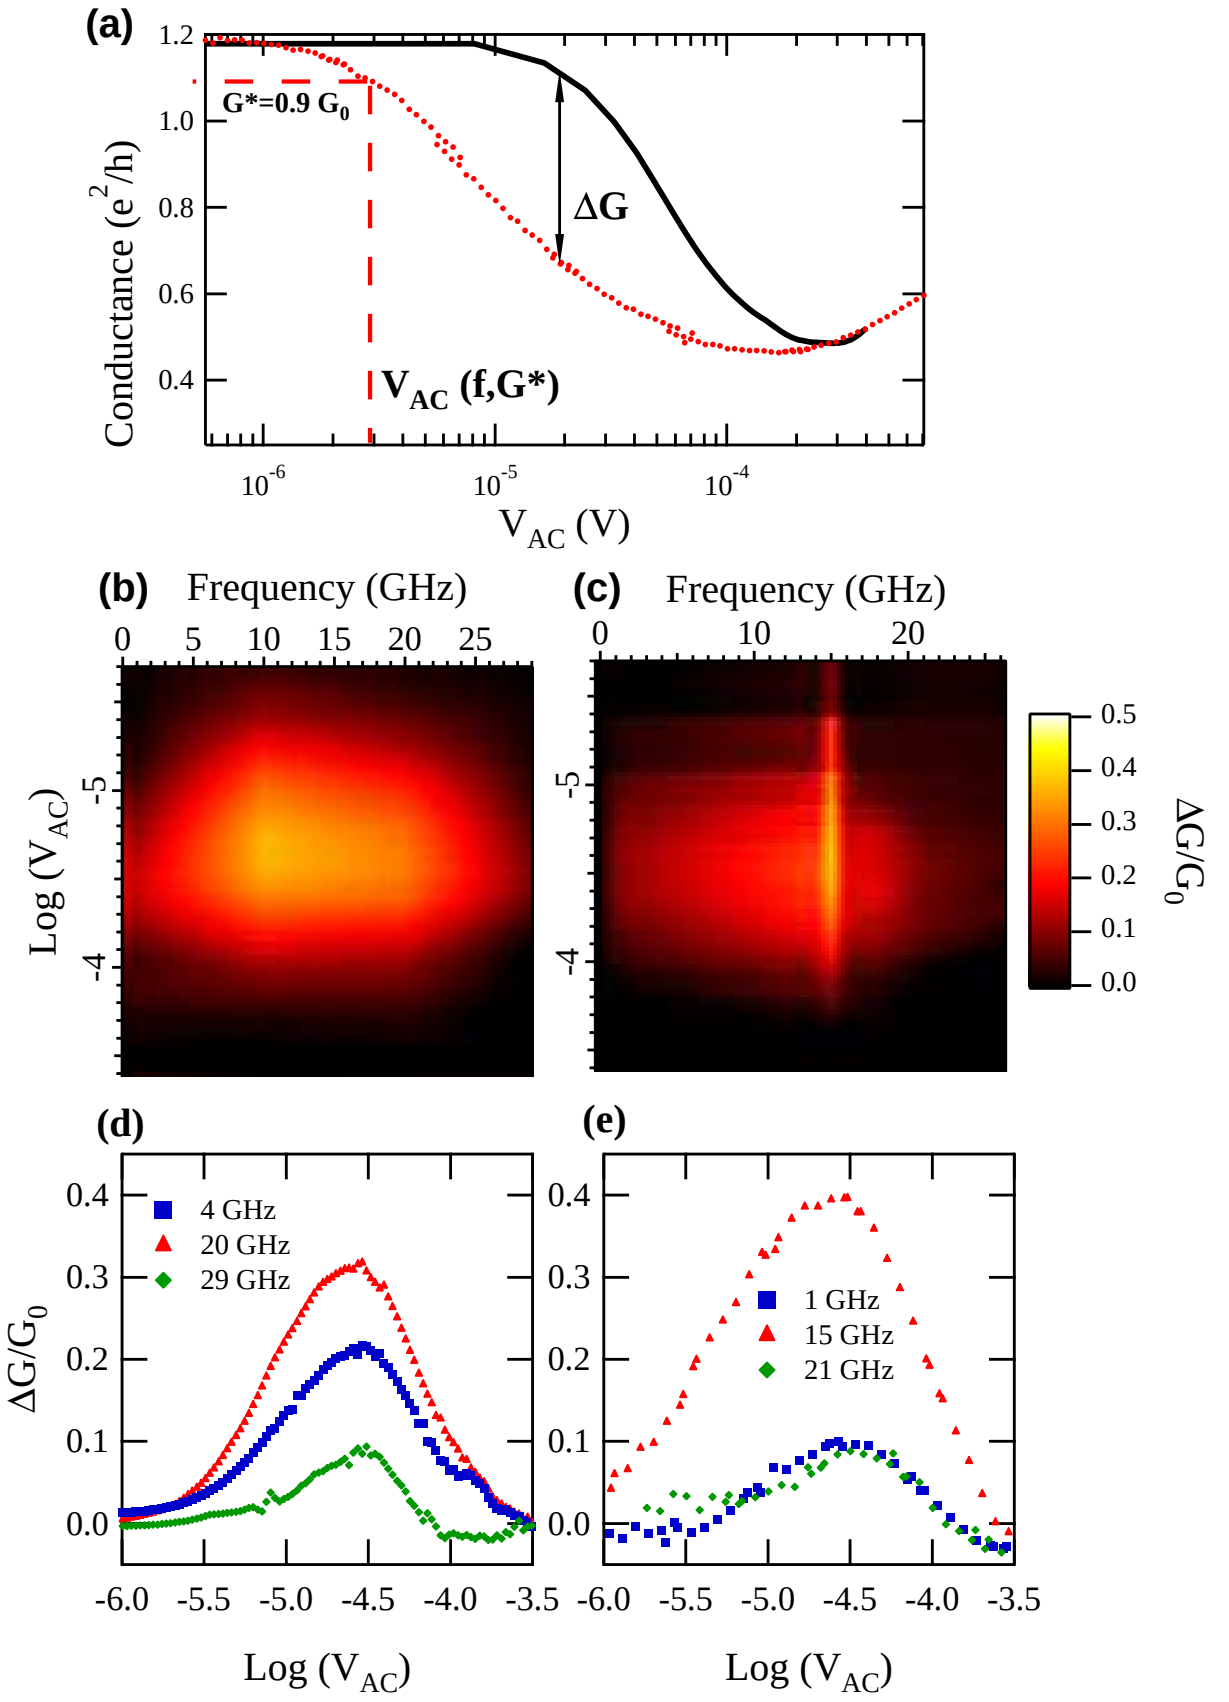

FIG. 2: (a) The suppression of the conductance at high frequencies relative to the expected adiabatic value, ΔG. The adiabatic values (dark solid line) are computed from measured static nonlinear conductance data via eqn. 1 as explained in the text. The V_{AC} voltage (in volts) shown corresponds to the signal level that produces a 10% suppression of the static peak conductance, G_0. (b)-(c) ΔG for two different SETs as a function of frequency and amplitude shows strong deviation of the conductance from adiabatic calculation based on eqn. 1 for frequencies near T_K. (d)-(e) $\Delta G/G_0$ versus amplitude for frequencies below, near and above $k_B T_K/h$ for both SETs.

both SETs used in the study. The strong amplitude sensitivity near T_K is found for both SETs.

Next we compare our measurements to the predictions of a renormalization group (RG) calculation by Kaminski et al.[16,17] with our frequency data sets for both SETs. The theory[16,17] provides the dynamic decoherence rate, $\hbar/\tau$, scaled to the Kondo temperature as a function of the amplitude and frequency of oscillations, both written in units of the

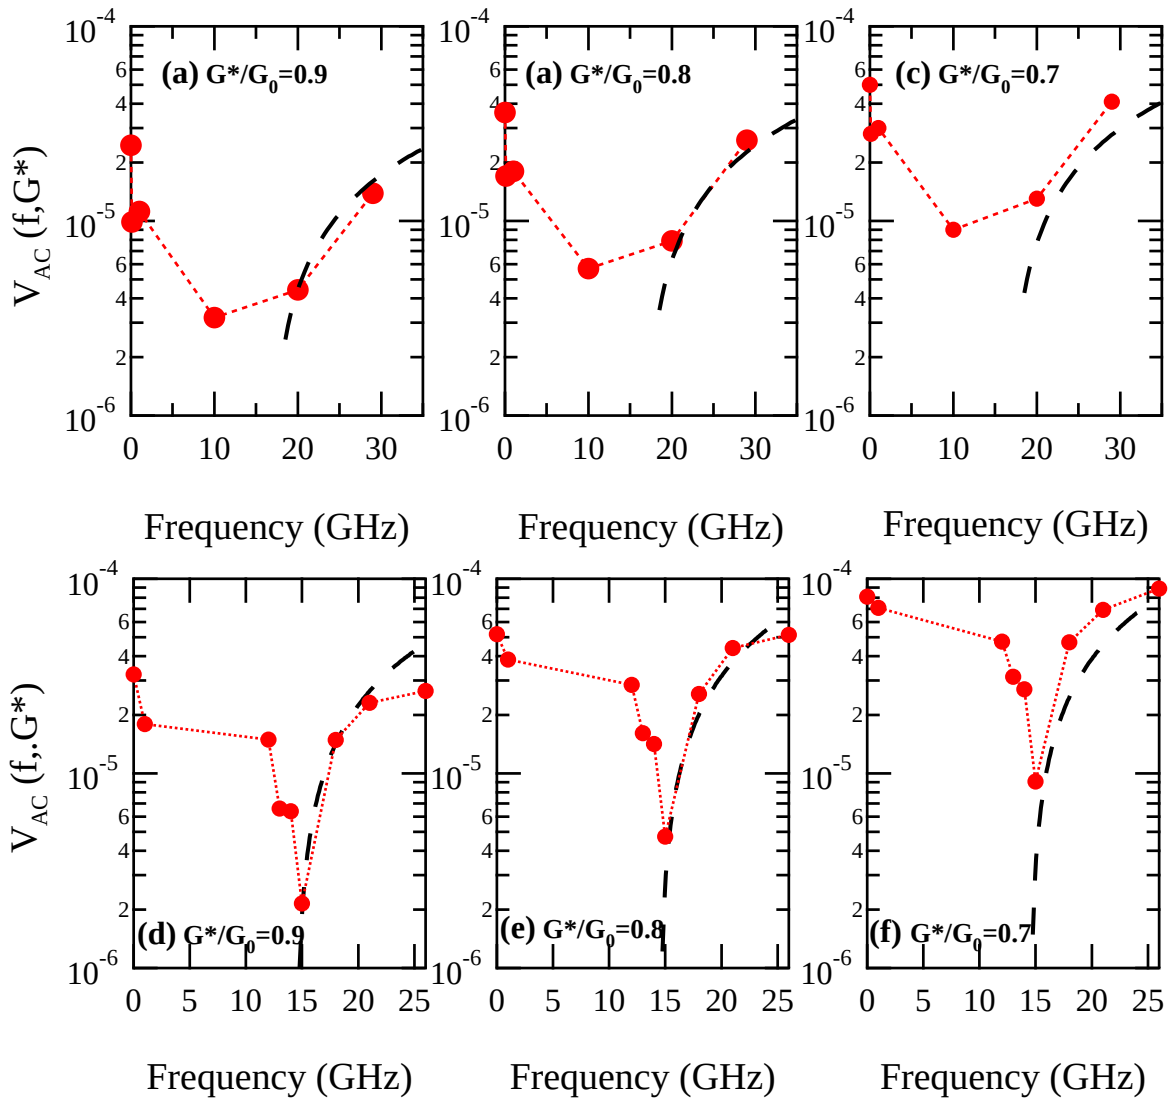

FIG. 3: Microwave voltage amplitude, V$_{AC}$ (in volts), that produces a certain conductance value G* for several choices of G* : (a)-(c) SET 1 and (d)-(f) SET 2. Three representative choices of conductance suppression are shown. SET 2 shows the strong amplitude dependence as f≈T$_K$. The black dashed lines represent the theoretical prediction for the voltages expected to produce the corresponding conductance suppression based on eqn 3 (see text).

Kondo temperature.

$$\frac{\hbar}{\tau k_B T_K} = \frac{1}{\pi}\frac{G_U}{e^2/\hbar}(\frac{eV_{AC}}{k_B T_K})^2 \frac{k_B T_K}{hf}\frac{1}{ln(hf/k_B T_K)^2} \tag{2}$$

The theoretical coefficient G$_U$ depends on the asymmetry between the QD and the two electron reservoirs and can be determined experimentally from static Kondo conductance at zero bias. For small amplitudes, the predicted conductance is linear with respect to the universal scaled decoherence rate:

$$G_{peak} = (1 - a\frac{\hbar}{\tau k_B T_K})G_U \tag{3}$$

where a is predicted to be of order 1[17]. We find that the conductance increases with frequency in this dynamic regime as predicted by eqn. 3. A quantitative agreement between the measured conductance and predicted conductance is found using a=6.2 for SET 1 and a=2 for SET2, both within reasonable agreement with the predicted a∼1 value. The predictions of theory based on eqn. 3 with these choices of the a parameter are shown as long, dashed line in fig. 3.

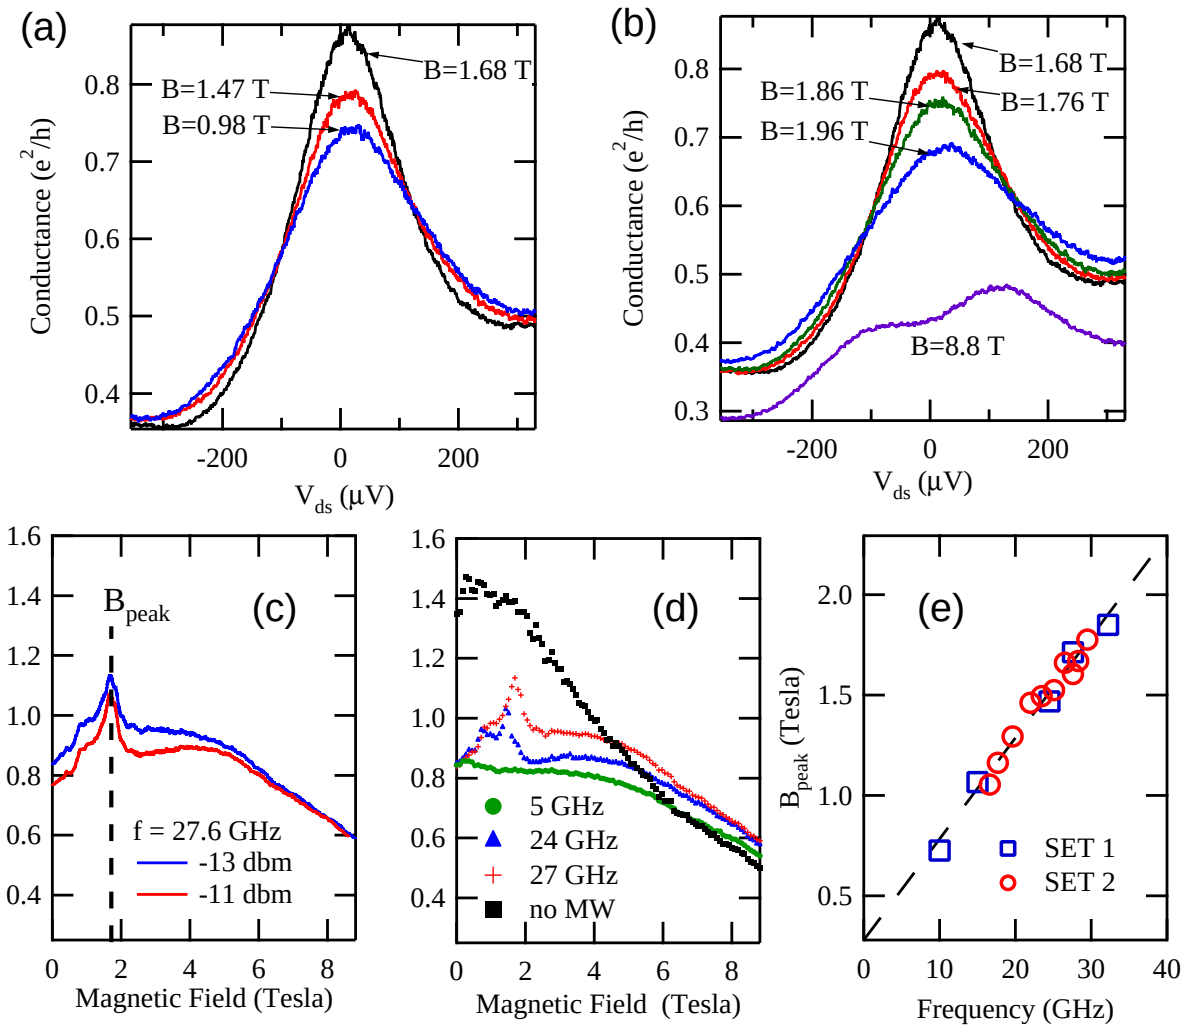

FIG. 4: (a) With microwaves applied, the zero bias conductance increases when small magnetic fields are present maximizing at 1.68T. (b) The peak conductance decreases past B = 1.68T. (c) Anomalous peak in G(B) a small magnetic field, B_{peak}, shown by vertical dashed line. B_{peak} is independent on oscillation amplitude. (d) The peak location is frequency dependent and disappears at small frequencies. (e) B_{peak} shifts linearly with frequency for both SETs.

In the presence of sufficiently large magnetic fields $B \geq T_K$, the Kondo peaks emerge at a finite bias instead of equilibrium[8,21–24], as seen in fig. 4 (b), due to the Zeeman splitting of the dot energy. It is theoretically predicted that the zero bias Kondo enhancement should then reappear when photons supply the energy necessary to flip the spin[12,25], i.e. when the frequency is in resonance with the Zeeman energy. To test this prediction, we have measured the zero-bias conductance as a function of magnetic field in the presence of bias oscillations for two separate devices. In both set-ups, T_K was tuned to ∼1 K. We applied several frequencies ranging between 1 GHz and 35 GHz and different microwave powers. Non-monotonic conductance behavior can be seen in fig. 4 (a) and (b). The Kondo enhanced peak grows as the B-field is tuned from 0.98 T to 1.68 T and then drops as the B-field is increased further to 1.96 T. Thus the zero bias conductance exhibits a sharp peak when plotted versus B. We now focus on the dependence of the position of this peak, B_{peak}, on microwave power and frequency.

First, we note that B_{peak} does not shift with microwave power as illustrated by two traces in fig. 4(c) taken at different powers. In measurements not shown here for brevity, we observed no power dependence of B_{peak} spanning a range of powers of at least two orders of magnitude. Interestingly, B_{peak} is frequency dependent. Fig. 4(d) shows that as the frequency increases the peak shifts towards higher values of B. We note that the peak is prominent at frequencies larger than $k_B T_K/h$ (24 and 27 GHz) and is absent at frequencies bellow $k_B T_K/h$ (5 GHz) which indicates that the observed peak is related to Kondo dynamics. The peak position's dependence on frequency is shown in fig. 4(e) for both SETs. We find that the Zeeman energy at the peak position is approximately 1/7th of the photon energy for all frequencies in which the peak is observed.

In conclusion, we have observed non-monotonic conductance dependence on frequency and external magnetic field in the presence of bias oscillations for frequencies near $k_B T_K/h$. With no applied field, we have found that the dynamic Kondo physics affects the SET conductance at frequencies significantly below the Kondo temperature. This is a surprising new result which was not reported in prior studies[9,10] that focused on frequencies comparable to or higher than the Kondo temperature. The departure of the conductance from the adiabatic predictions is maximized when both hf and eV_{AC} are comparable to $k_B T_K$. In agreement with theoretical predictions[17], we further find that the supression becomes smaller as the frequency rises above $k_B T_K/h$. When the in-plane magnetic field is applied, we observe non-monotonic changes of the conductance with B evidenced by sharp peaks at field values that show no amplitude sensitivity and shift linearly with frequency. These peaks only appear when the excitation frequency is close to the Kondo temperature and are not observed at lower frequencies, which suggest that these are related to dynamic Kondo physics. Surprisingly, the corresponding Zeeman energies,Δ_Z, are very small: we find $\Delta_Z = 1/7hf$ which disagrees quantitatively with the predicted[12] $\Delta_Z = hf$ relationship. The origin of these peaks is presently not understood, and we hope that these observations will invite further theoretical studies of the dynamic transport in Kondo-correlated systems.

The research is supported by the NSF DMR award No. 0804199, NSF DMR award No. 1206784 and by University of Cincinnati. We thank Tai-Min Liu for device fabrication, and J. Markus, M. Ankenbauer and R. Schrott for technical assistance.

---

[*] Electronic address: andrei.kogan@uc.edu

[1] J. Kondo, Prog. Theor. Phys. **32** (1964).

[2] A. C. Hewson, *The Kondo Problem to Heavy Fermions* (Cambridge University Press, 1993).

[3] P. Coleman, *Heavy Fermions: Electrons at the Edge of Magnetism* (John Wiley & Sons, 2007).

[4] D. Goldhaber-Gordon and et al., Nature **391**, 156 (1998).

[5] D. Goldhaber-Gordon and et al., Phys. Rev. Lett. **81**, 52255228 (1998).

[6] S. Cronenwett, T. Oosterkamp, and L. Kouwenhoven, Science **281**, 540 (1998).

[7] M. Grobis, I. G. Rau, R. M. Potok, H. Shtrikman, and D. Goldhaber-Gordon, Phys. Rev. LEtt. **100** (2008).

[8] T.-M. Liu and et al., Phys. Rev. Lett. **103**, 026803 (2009).

[9] J. M. Elzerman and et al., JLTP **118**, 375 (2000).

[10] A. Kogan, S. Amasha, and M. Kastner, Science **304**, 1293 (2004).

[11] M. R. Delbecq and et al., Phy. Rev. Lett. **107** (2011).

[12] A. Schiller and S. Herschfield, Phys Rev. Lett. **77**, 18211824 (1996).

[13] T.-K. Ng, Phys. Rev. Lett. **76**, 487490 (1996).

[14] R. Lopez, R. Aguado, G. Platero, and C. Tejedor, Phys. Rev. Lett. **81**, 46884691 (1998).

[15] Y. Goldin and Y. Avishai, Phys. Rev. Lett. **81**, 53945397 (1998).

[16] A. Kaminski, Y. V. Nazarov, and L. I. Glazman, Phys. Rev. Lett. **83**, 384 (1999).

[17] A. Kaminski, Y. V. Nazarov, and L. I. Glazman, Phys. Rev. B **62**, 8154 (2000).

[18] P. Nordlander, N. Wingreen, Y. Meir, and D. Langreth, Phys. Rev. B **61**, 21462150 (2000).

[19] C. Latta and et al., Nature **474**, 627630 (2011).

[20] T.-M. Liu and et al., Phys. Rev. B **61**, 21462150 (2000).

[21] Y. Meir, N. Wingreen, and P. Lee, Phys. Rev. Lett. **70**, 2601 (1993).

[22] J. Moore and X.-G. Wen, Phys. Rev. Lett. **85**, 17221725 (2000).

[23] T. Costi, Phys. Rev. Lett. **85**, 15041507 (2000).

[24] C. Wright, M. Galpin, and D. Logan, Phys. Rev. B **84**, 115308 (2011).

[25] T. Nguyen, arXiv:1212.3095 cond-mat.mes-hall (2012).